


FOR APPROVAL

REV. NO	DATE	REVISION RECORD	DR	CK	APP
△					
△					

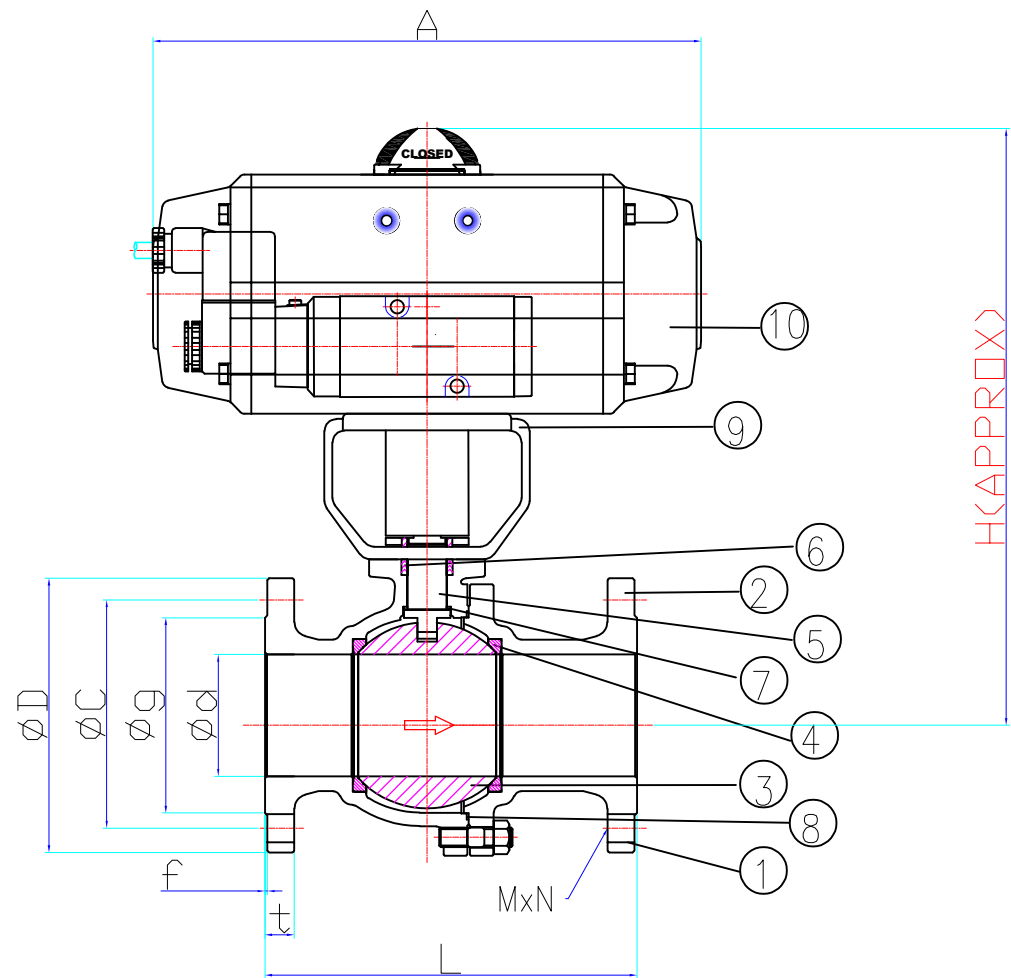

NO.	DESCRIPTION	MATERIAL	Q'TY	REMARKS
11	SOLENOID VALVE	AL	1	
10	ACTUATOR	AL	1	
9	BRACKET	SCS13	1	
8	GASKET-BODY TO CLOSURE	RTFE	1	
7	THRUST WASHER	RTFE	1	
6	V-PACKING	RTFE	1SET	
5	STEM	A276 304	1	
4	SEAT	RTFE	2	
3	BALL	304SS	1	
2	CAP	SCS13	1	
1	BODY	SCS13	1	

* ACTUATOR SPECIFICATION

OPERATING MEDIUM	COMPRESSED DRY AIR
STANDARD OPERATING PRESSURE	5Kg/CM2
OPERATING PRESSURE RANGE	4 ~ 7 Kg/CM2
OPERATING ANGLE	90° (0° ~ +95°)
OPERATING TIME (CLOSE → OPEN)	MAXIMUM 30 SECOND (SPEED CONTROL)
SERVICE TEMPERATURE	20°C ~ +80°C

(UNIT : mm)

SIZE	DIMENSION										MODEL	
	d	g	C	D	f	t	L	MxN	A	H		Q'ty
10K-25A	25	67	90	125	1	14	127	4xØ19	150	210	1	BT-52D

PROJECT NAME

MEGATEC

SCALE	N. S.	PNEUMATIC ON-OFF BALL VALVE		
DRAWN BY	T.K.KIM	DOUBLE ACTING, JIS 10Kg, FLANGE		
APPROVED BY	T.K.KIM	DATE	DRAWING NO.	REV.
		2023. 03. 02.	MG23-0302-01	NO