



Valve Specification

OPERATING	<input checked="" type="checkbox"/> PNEUMATIC	<input type="checkbox"/> ELECTRIC	<input type="checkbox"/> MANUAL(GEAR/LEVER)
VALVE BODY	<input type="checkbox"/> FC	<input type="checkbox"/> FCD	<input type="checkbox"/> SCPH2 <input checked="" type="checkbox"/> SUS304 <input type="checkbox"/> SUS316
VALVE SEAT	<input type="checkbox"/> EPDM	<input checked="" type="checkbox"/> PTFE	<input type="checkbox"/> RTFE <input type="checkbox"/> CARBON <input type="checkbox"/> PEEK
RATING	<input checked="" type="checkbox"/> JIS10K	<input type="checkbox"/> JIS20K	<input type="checkbox"/> ANSI150# <input type="checkbox"/> ANSI300# <input type="checkbox"/> DIN10 <input type="checkbox"/> DIN16
CONNECTION	<input type="checkbox"/> RF FLANGE	<input type="checkbox"/> FF FLANGE	<input type="checkbox"/> WAFER <input type="checkbox"/> LUG <input checked="" type="checkbox"/> THREAD
ACCESSORY	<input type="checkbox"/> SOLENOID V/V	<input type="checkbox"/> FILTER®ULATOR	<input type="checkbox"/> LIMIT SWITCH BOX
	<input type="checkbox"/> HANDWHEEL	<input type="checkbox"/> POSITIONER	<input checked="" type="checkbox"/> NONE

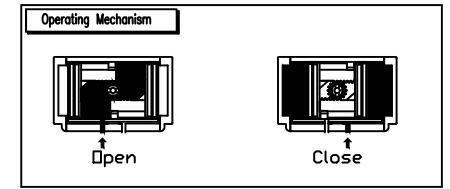

■ ROTATING ANGLE	
<input checked="" type="checkbox"/> 100% OPEN&CLOSE	
<input type="checkbox"/> 50% CLOSE	
<input type="checkbox"/> 50% OPEN	



■ Actuator Specification

Specification	Type	DOUBLE ACTING ACTUATOR
Valve Type		3-PIECE SCREWED BALL
Rating		JIS10K SCREWED
Operating Medium		Compressed dry air
Standard operating pressure		5kg/cm ²
Operating pressure range		4 ~7kg/cm ²
Operating angle		90°
Operating time(close → open)		Maximum 30 Second

■ DIMENSION (UNIT: mm)

MODEL	SIZE		A	A1	H	L	ØD
	mm	Inch					
BT040D-8S3A	8A	1/4"	110	56	116	64.5	8

Designed by	Checked by	Approved by	File name	Date	Scale	Unit
D.K.PARK	T.K.KIM		PNEUMATIC VALVE	2019.12.11	N/S	mm
			Title			
			PNEUMATIC 3 PIECE SCREWED BALL VALVE (8A)			
			Model		Drawing no.	
			BT040D-8S3A		KST191211-31	